

Choosing the right connectivity solution is crucial for your IoT deployment

For IoT products, based on cellular connectivity (LTE, LTE-M, NB-IoT and 5G), are deployed it is important to choose the right connectivity partner especially when you deploy globally to avoid high bills and issues that stop your application from operating due to permanent roaming restriction (PRR) which are potentially impossible to fix remotely or only against very high cost locally.

P. de Leng - AVE BV

D&E
EVENT



Het ontwerpen van
innovatieve elektronica

Woensdag 19 april 2023
1931 Congrescentrum 's-Hertogenbosch

Schedule

- What is a SIM card?
- Which physical formats are available?
- Paying for your data?
- What are the benefits of selling connectivity with your IoT?
- Prepaid or subscription?
- MNO or MVNO?
- Connectivity Management Platform?
- What are E-SIM, UICC and Multi-IMSI?
- Is price important?



What is a SIM?

Subscriber Identity Module

So literally an IC with which it is checked if you have a valid subscription that allows access to a cellular network.

On the IC are:

Unique Number

IMSI (International Mobile Subscriber Identity)

Security, Authorisation and encryption

Temporary information about the network

Processor ?! → 32 bit risc core




D&E
EVENT



Woensdag 19 april 2023
1931 Congrescentrum 's-Hertogenbosch

Some Hardware features of typical SIM.

- Up to 250kB for MNO profiles and OEM data
- 32-bit ARM® CPU in 40 nm CMOS technology
- 20 kB RAM
- Crypto engine for PKI, RSA & ECC
- Crypto engine for 3DES, AES (up to 256-bit)
- True Random Generator
- SW & HW Countermeasures Timing Attack SPA/DPA/DFA
- Extended Temperature Range
- ESD protection >4KV
- Card and SMD form factors 2FF/3FF/4FF/SimFit/MFF2
- Interfaces: ISO
- IC EAL5+ certification
- ROHS & REACH compliance

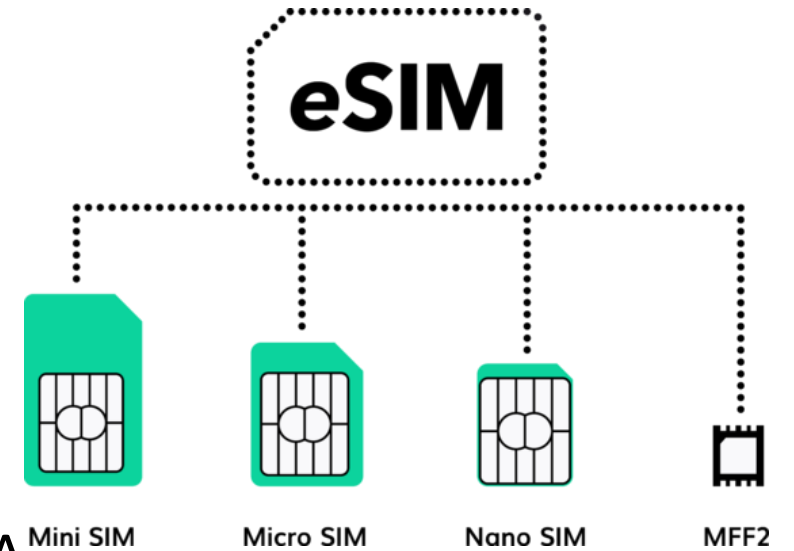

D&E
EVENT

Het ontwerpen van innovatieve elektronica

Woensdag 19 april 2023
1931 Congressentrum 's-Hertogenbosch

Some software features of typical (SIM 1)

- GSMA SGP.02 v4.0 compliance
- SIMalliance: eUICC Profile Package v2.2
- Emergency and Test Profile support
- GP certified test tool report
- GSMA EUM certificate
- Global Platform 2.2.1 (A/B/D/E) support
- Java Card™ 3.0.5 Classic
- javacard.security
- javacardx.crypto
- uicc.*, uicc.usim.*
- org.globalplaform
- uicc.usim.geolocation



D&E
EVENT

Het ontwerpen van innovatieve elektronica

Woensdag 19 april 2023
1931 Congressentrum 's-Hertogenbosch

Some software features of typical (SIM 2)

- NAA algorithms (with OTA switch):
- Milenage
- TUAK
- Value Added Applets
- eUICC AUTO Applet (eCALL/ERA-GLONASS)
- eUICC Notification Applet
- Local Management
- OS Maintenance
- OS Update (option)
- High Stress Memory
- Dedicated memory area for frequent updated files




D&E
EVENT



Woensdag 19 april 2023
1931 Congrescentrum 's-Hertogenbosch

Types of Connectivity Providers

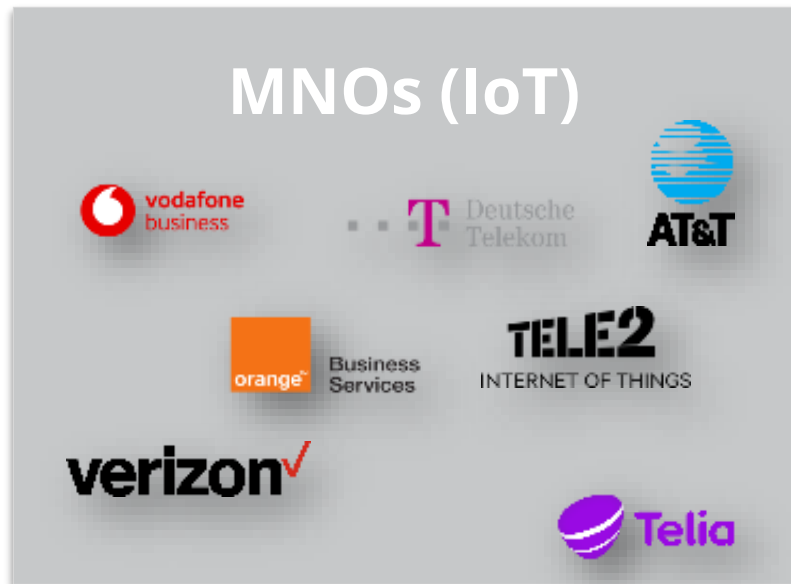

Why choose for an MVNO?

Redundancy :

Use one of the available native MNO's to get always a connection.

Good MVNO:

Almost no steering. Connection based on strongest signal not the lowest cost for the MVNO. Network re-registration time stays low.

Strongest signal means less power consumption and more online presence for better user experience. Due to less reconnection and broken data transfers and retries lower data usage and cost.

Some MVNO's are also modem manufacturer enabling secure low level remote diagnostics beyond your application level.

Only one point of contact to negotiate pricing for european and global deployment



D&E
EVENT

Het ontwerpen van innovatieve elektronica

Woensdag 19 april 2023
1931 Congressentrum 's-Hertogenbosch

Optimized Billing System




Automated IoT data plan management solution

Assigning each individual **SIM** to the **most cost-effective plan**

Removes operational overhead on rate plan management

Avoid **Bill Shock**

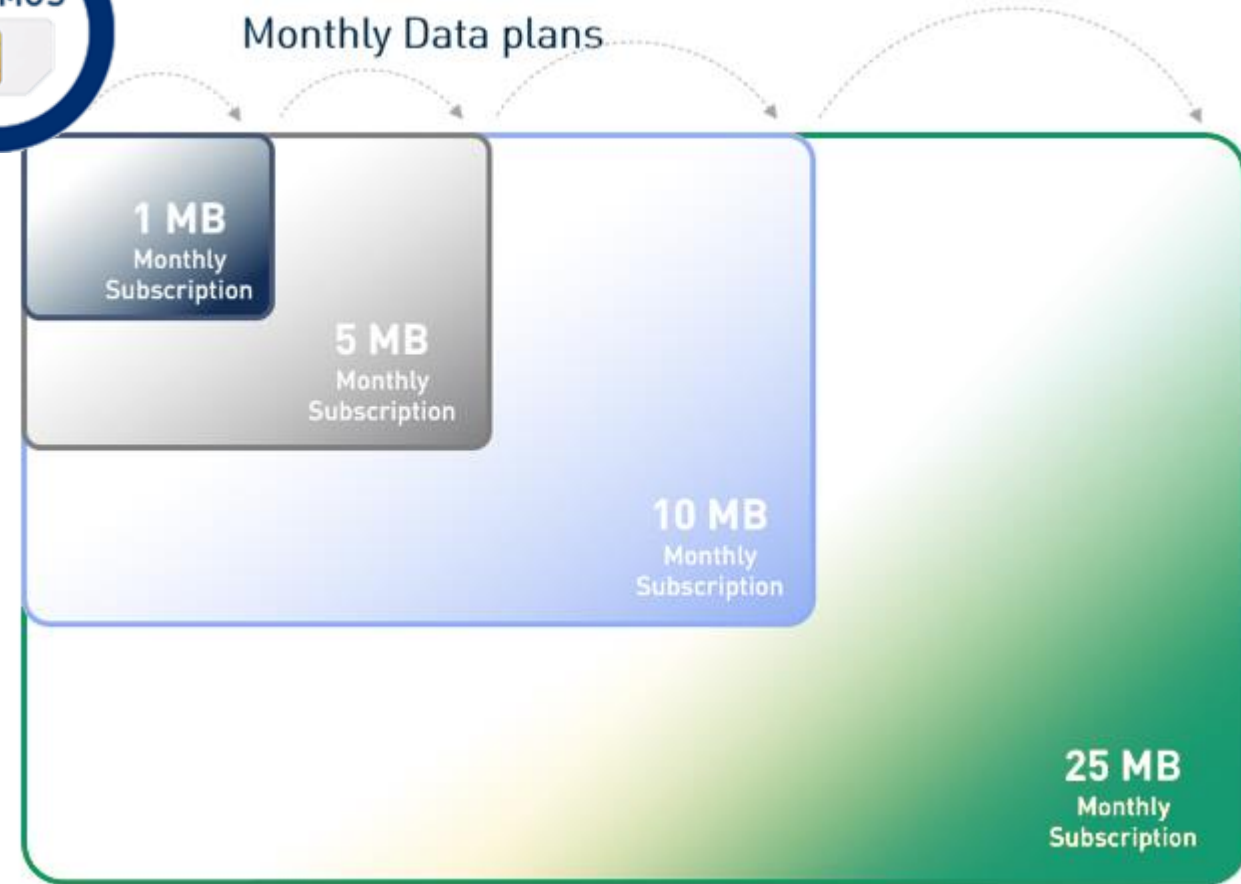

Future-Proofing Global IoT Connectivity

The Challenges of Global IoT Coverage



Cost Instability



Mission Critical Needs



Roaming Restrictions



Evolving Cellular Technologies



D&E
EVENT

Het ontwerpen van innovatieve elektronica

Woensdag 19 april 2023
1931 Congrescentrum 's-Hertogenbosch

CMP Connectivity Management Platform



Location

device location and history to ensure fleets stay on route or be notified when a vehicle is close by



Complete visibility

granular control from one intuitive dashboard



Data and diagnostics

real-time diagnostics, data and analytics to optimize your deployment



API Integration

use our robust API library to integrate into Telit's developer-friendly platform





Drive down costs

monitoring can save you money by stopping unwanted usage or alerting you to behaviors



NEXT Architecture Diagram

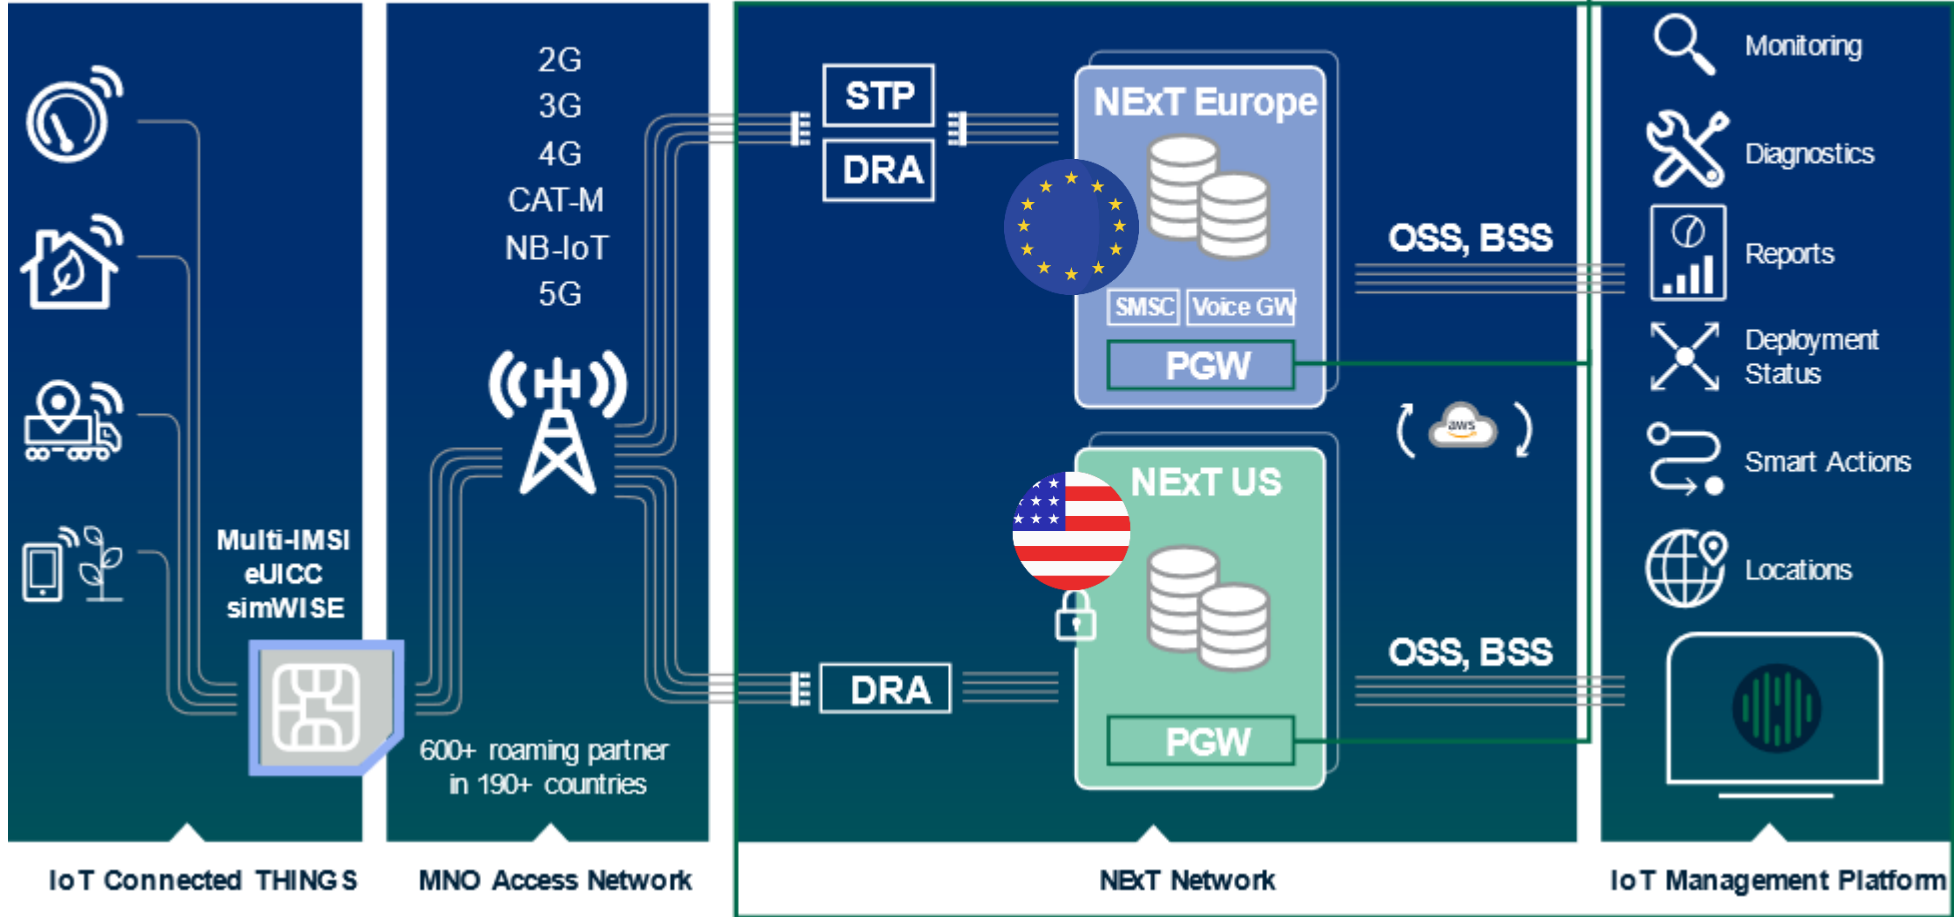

Typical IoT MVNO Connectivity Offerings

Mostly local MNO's

Single IMSI Roaming

Limited Global Roaming

Solution/Consumer

Limited Local Solution

Fixed IMSI predefined

Per coverage / price list

No ability to switch IMSI

IoT MVNOs FORTE

Multi-IMSI Roaming

Global Roaming Solution

Multi IMSI capabilities

Switch between IMSI

Mission critical / avoid outage

eUICC / Localization

Global SIM with Local Profile

where needed

Ability to do provider switch

Bring Your Own Connectivity

NEXTPlusTM

PRR - Permanent Roaming Restriction

AVE
ADDED VALUE
ELECTRONICS

D&E
EVENT

Het ontwerpen van innovatieve elektronica

Woensdag 19 april 2023
1931 Congressentrum 's-Hertogenbosch

Why eUICC?

If your sim is eUICC capable it is possible to upload over the air a new SIM Profile which could represent a local SIM to avoid permanent roaming restriction if not known before or simply reduce connectivity cost.

With Multi IMSI you can have the same result if all things are known before.

Please realize especially with global deployment the permanent roaming does not bring the Native MNO as much money as they would have from native customers so many MNO's do not allow permanent roaming at all and this landscape seems to get more and more dynamic.

This is a very complex situation and you should select a connectivity partner that is able to offer flexible optimized solutions for your situation. Imagine if you have soldered down chipsims and no external sim card alternatives.




D&E
EVENT

Het ontwerpen van innovatieve elektronica

Woensdag 19 april 2023
1931 Congrescentrum 's-Hertogenbosch

Tier 1 Global IoT MVNO

All on a Single SIM

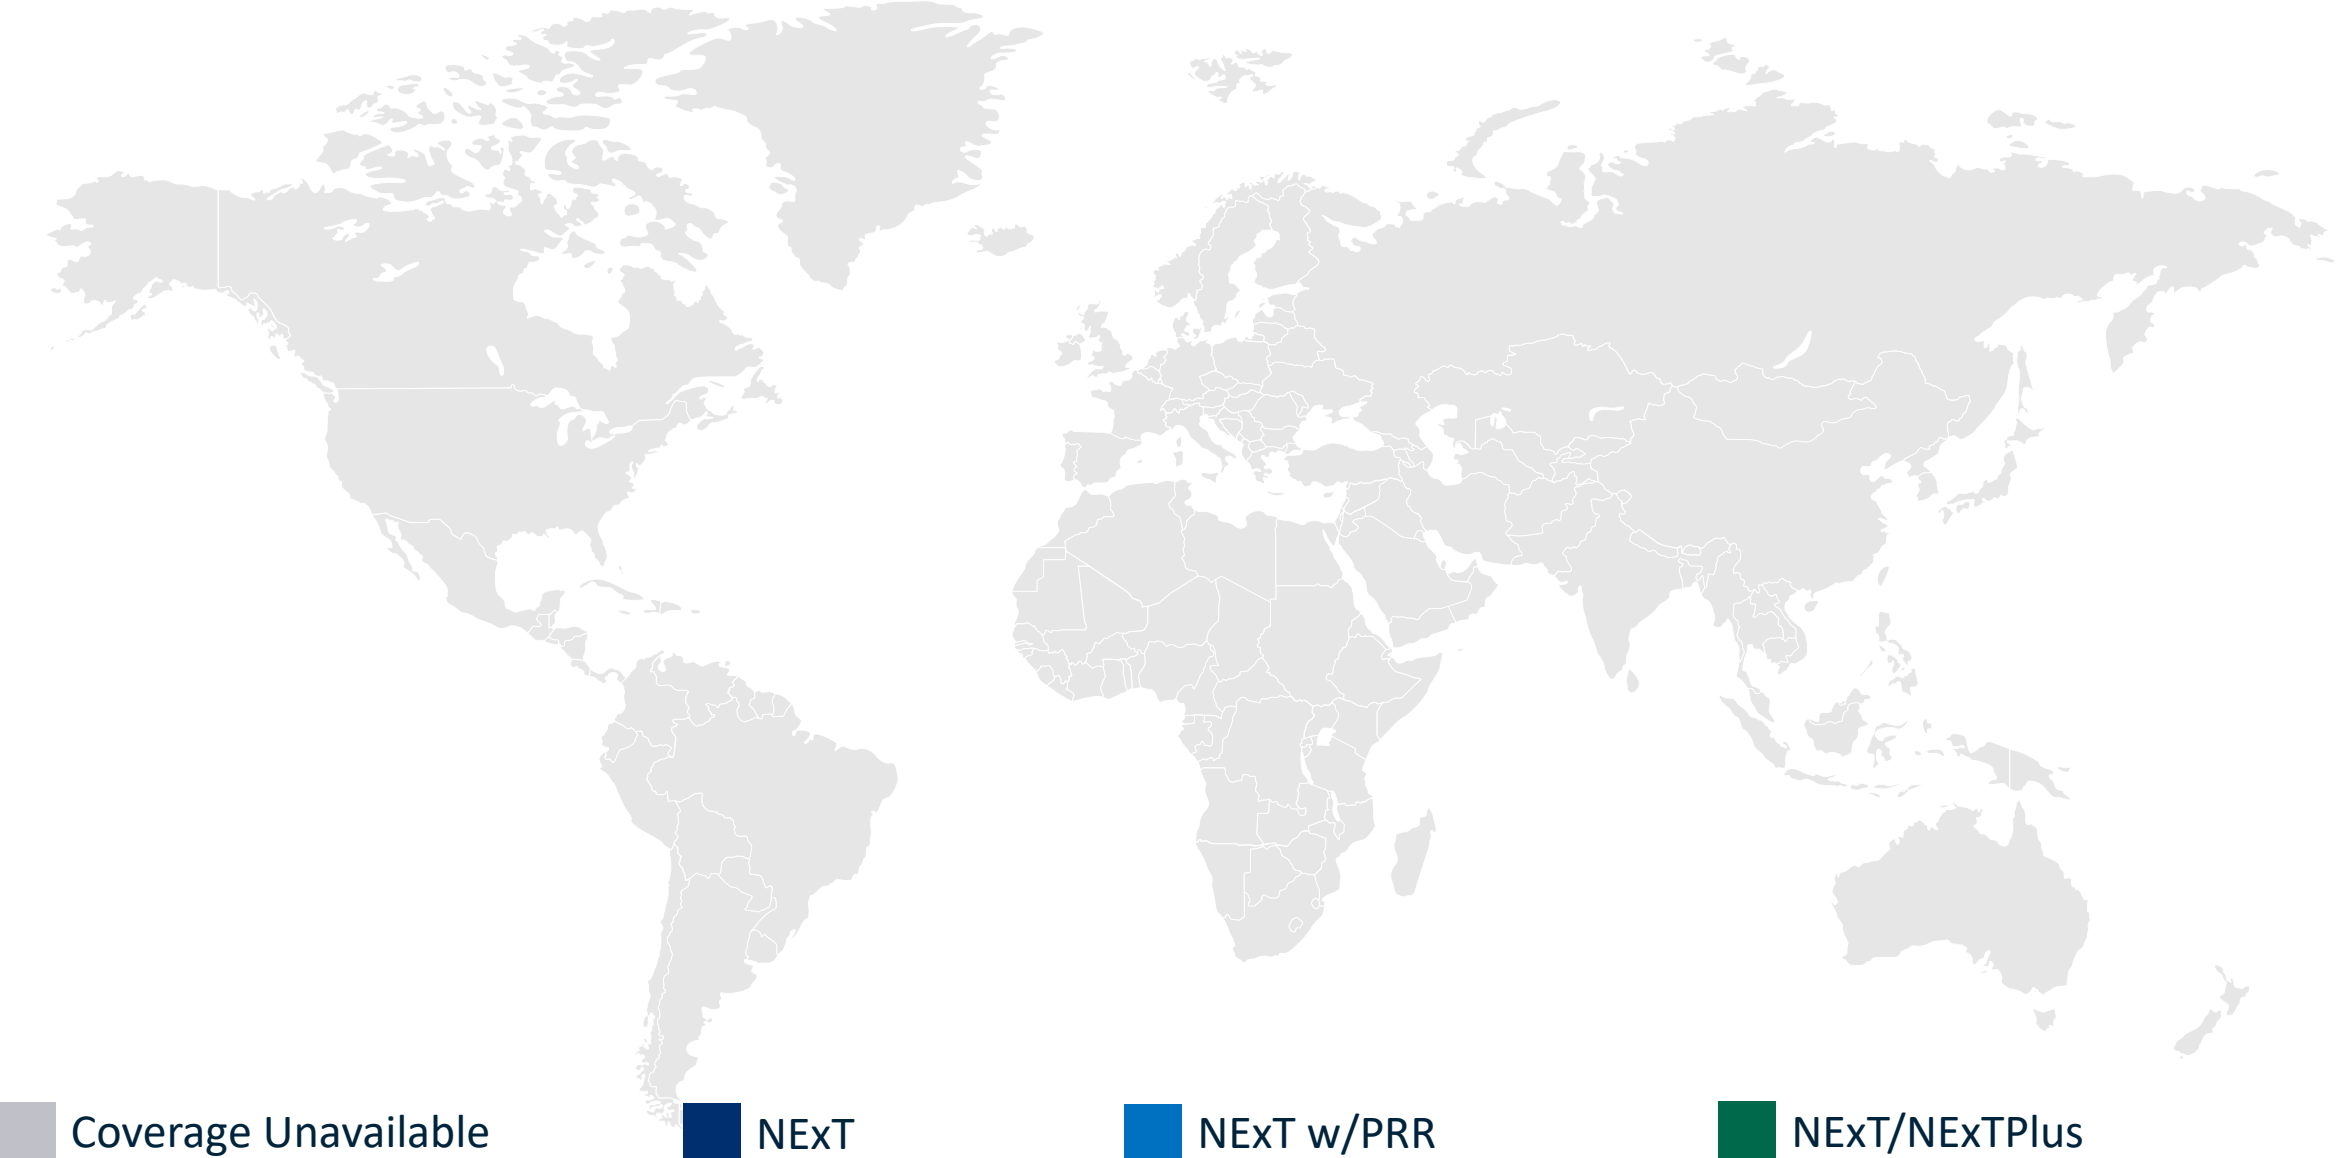

World Class Customer Service

First-in-class **support**

24/7/365 US & EU based time
zone

Regional presence
trusted IoT experts

In-depth **support**
complete value chain

Comprehensive **CMP**
Superior monitoring and
alerting tools

Simplified **billing**
Optimus - optimized billing
service



**Please visit booth 20 to see the demonstration of our CMP
or send me an email peter@ave-nl.com**



With the leverage of the biggest supplier in the western hemisphere Telit Cinterion now offers the biggest portfolio of IoT modules with reliable worldwide connectivity solutions enabling indepth remote diagnostics and unprecedented end to end security.

NEXTPlusTM

Beyond connectivity Telit Cinterion supports over the air firmware update of their own IoT module which is important for evolving networks and with OneEdge can offer you complete application and fast time to market with almost no programming and end to end security.

